


Microprocessor RPM,Speed, Pulse, Length, Fluid & Setting Digital Meter

Features:

- Output/Display/Setting Range User Selectable
- Dual Aux. Power 110/220V AC
- High Accuracy Pulse Input 0.01%FS + 1 Count
- Analog or Digital RS-485 Output



DMU — 							
Input Signal		Alarm Setting		Output Signal		Aux. Power	
A	Open Collect (NPN)	A	2 Alarm Setting	A	DC 0~10mA	A	AC 110/220V
B	Voltage Pulse			B	DC 0~20mA	C	DC 22~72V
C	Relay Contact			C	DC 4~20mA	F	AC/DC85-265V
D	PNP	N	None	D	DC 0~5V	Y	Other
Y	Other			E	DC 1~5V		
				F	RS-485		
				N	None		
				Y	Other		

SPECIFICATIONS:

INPUT:

Input Type : Open Collect Type : 5 ~ 30V DC, 3mA.
Voltage Pulse Type : 2V DC P-P ~ 200V DC P-P.
Relay Contact Type : 5 ~ 30V DC, 3mA.

OUTPUT & DISPLAY:

DC Current: 0 ~ 20 mA DC

Load resistance drive: output drive 10 VDC maximum

Output	Load Resistance
0 ~ 10 mA :	1000 Ω
0 ~ 20 mA :	500 Ω
4 ~ 20 mA :	500 Ω

DC Voltage: 0 ~ 10 V DC

Load resistance drive: output drive 5 mA maximum


Output	Load Resistance
0 ~ 5 V :	1 K Ω
1 ~ 5 V :	1 K Ω
0 ~ 10 V :	2 K Ω

Output Response Time : ≤ 1 Sec.
Digital Output Load : RS-485 Output, 1200,2400,4800,9600,19200 Baud Rate, User Selectable.
Display Range : 0.56" Super Rate LED 4-1/2, 5 Digits, ± 19999 Counts. Display Range User Selectable


INSTALLATION & PERFORMANCE:

Accuracy : Analog Input 0.15%FS + 1 Count at 23°C $\pm 3^\circ$ C.
Pulse Input 0.01%FS + 1 Count at 23°C $\pm 3^\circ$ C.
Exciting Voltage : 12V/25mA DC maximum.
Sensing Range : 50~20K Hz Selectable.
Setting Function : Dual Setting & Contact Points, Setting Function User Selectable.
Setting Range : ± 19999 Counts User Selectable.
Dead Band : 0 ~ 9999 Counts User Selectable.
Time Delay : 0 ~ 99 Sec. User Selectable.
SPDT Capacity : AC 120V 5A, 250V 3A, DC 24V 3A.
Stability : $\leq 0.2\%$ /Year.
Temperature Coefficient : ≤ 100 ppm / $^\circ$ C From 0 ~ 60°C.
Operating Condition : -10°C ~ +55°C 20 ~ 95% RH Non-Condensed.
Storage Condition : -40°C ~ +75°C 20 ~ 95% RH Non-Condensed.
Power Supply : AC or DC $\pm 20\%$, 50 / 60Hz.
Outline Dimension : 1/8 DIN 96W X 48H X 135D mm.
Mounting : Panel Flush Mounting.


FRONT VIEW(mm)



SIDE VIEW




OUT CUT



Terminal Connection

1	2	3	4	5	6	7	8
NO	COM	NC	NO	COM	NC	+	-
S1			S2			Output Analog or RS-485	
+		-		EXT.V		AC 220V 110V Aux Power + DC -	
9	10	11	12	13	14	15	16

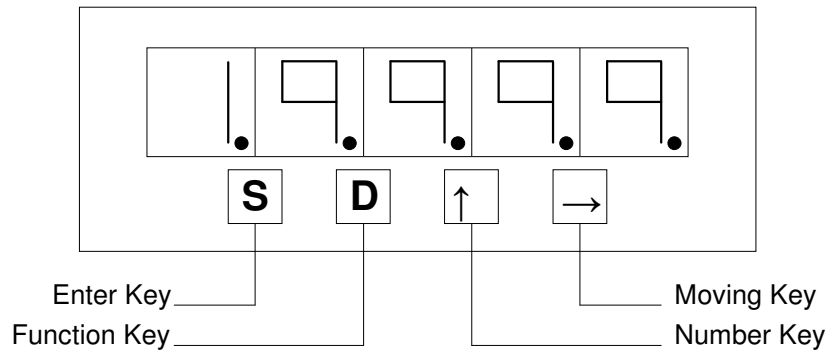

The setting functions divided into two categories :

- (A) Input/Output/Display Functions
- (B) Contact Point S1/S2 Setting

Procedures :

- (1) Press "S" key, display "00" blinking
- (2) Press "D" key, enter "01"~"09" functions
- (3) Press "→" key, enter "51"~"59" to setting directly after press
- (4) Press "→" key, to change position.
- (5) Press "↑" key, to change number.

Repeat procedure (1)~(5).

Press "D" and "→" at the same time for QUIT.

PRESS "D" TO SAVE SETTING VALUE AFTER "09".

(A) Input/Output/Display Functions "02"~"09" :

- 02 Lowest display value(OFFSET), -19999 ~ +19999.
- 03 Highest display value(GAIN), -19999 ~ +19999.
- 04 Decomal point, change decimal point position.
- 05 Analog output range
Change output value 0~20mA, 4~20mA, 0~10mA, 0~5V, 1~5V, 3~5V, 0~1V.
* Display 12~20 means 4~12~20mA, display 3~5 means 1~3~5V.
- 06 Digital output Baud Rate
1200, 2400, 4800, 9600, 19200.
* Display 9200 means 19200.
- 07 Address, 01~99(PC or Host Console Address=0)
32 devices maximum for RS-485 format.
- 08 Output vs Display rating.
Step 1 : Press "D" setting output FULL SCALE value.
Step 2 : Press "D" again setting output ZERO value.
- 09 Special function : Save, Reset, Uni or Bi Directions etc..
DISPLAY "99" PRESS "D" TO SAVE "02"~"09" DATA.

(B) Contact Point S1/S2 Setting "51"~"59" :

- | | | | | | |
|----|--|---------------|----|----|-------------|
| 51 | S1 Setting | Setting Value | | | |
| 52 | S1 Dead Band | 0~9999. | S1 | S2 | 0=Lo, 1=Hi, |
| 53 | S1 Time Delay | 0~99 Sec. | 0 | 0 | Lo-Lo |
| 54 | S2 Setting | Same as 51. | 1 | 0 | Hi-Lo |
| 55 | S2 Dead Band | Same as 52. | 0 | 1 | Lo-Hi |
| 56 | S2 Time Delay | Same as 53. | 1 | 1 | Hi-Hi |
| 57 | S1, S2 setting condition. | | | | |
| 58 | Start Delay Time 0~999 sec., input from zero, no alarming motion within the time | | | | |
| 59 | Special Function. Same as 09. | | | | |