


Microprocessor Digital DC Current Generator

Features:

- Dual Aux. Power 110/220V AC
- High Accuracy 0.1% FS + 1 Count

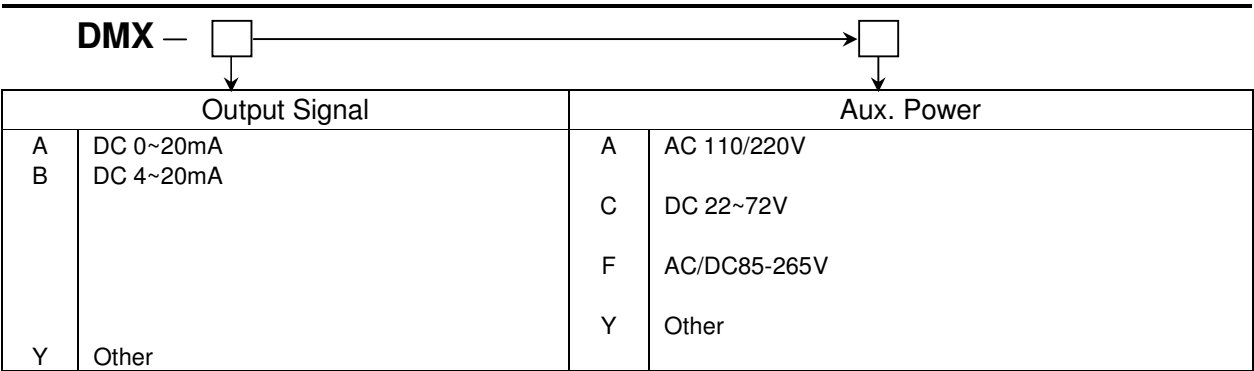

SPECIFICATIONS:

Accuracy : 0.1%FS + 1 Count at 23°C ± 3°C.
Display Range : 0.56" Super Rate LED 4-1/2, 5 Digits, ±19999 Counts. Display Range User Selectable.
Output Capability : 0 ~ 120%.
Stability : ≤ 0.2%/Year.
Operating Condition : -10°C ~ +55°C 20 ~ 95% RH Non-Condensed.
Storage Condition : -40°C ~ +75°C 20 ~ 95% RH Non-Condensed.
Power Supply : AC or DC ±20%, 50 / 60Hz.
Outline Dimension : 1/8 DIN 96W X 48H X 135D mm.
Mounting : Panel Flush Mounting.

Terminal Connection

