

FEATURES

- Suitable for 1 ϕ 2W / 1 ϕ 3W / 3 ϕ 3W / 3 ϕ 4W system
- Size: 96 W x 48 H x 100 D (mm)
- 5 Digit display: -32768~32767 Count
- Optional RS-485 Modbus RTU
- Optional DC 4~20mA output
- Bi-direction measurement and display



FUNCTION SELECTION


MMQ - code1 code2 code3 code4 code5 code6

CODE 1 INPUT VOLTAGE		CODE 2 INPUT CURRENT		CODE 3 INPUT FREQUENCY		CODE 4 OUTPUT 1		CODE 5 OUTPUT 2		CODE 6 AUX. POWER	
1	55-440V(L-L)	1	1A	1	50 HZ	1	2Alarm	1	RS-485	3	DC 22~72V
		2	5A	2	60 HZ	3	DC 4~20mA		ModbusRTU	6	AC/DC85~265V
						0	None	0	None		
Y	Other	Y	Other	Y	Other	Y	Other	Y	Other	Y	Other


SPECIFICATIONS

Accuracy	: $\pm 0.5\%RD$ at $23^{\circ}C \pm 3^{\circ}C$	Output Function	: 4~20mA 330Ω at 20ma (Optional)
Display Range	: 0.4"High brightness red LED 5-digit -32768~32767	Alarm Function	: 2Alarm Setting (Optional)
Input Range	: Input 55~440V(L-L) (Max: 500V L-L) Normal Current 5A, Effective Range 0~6A Normal Current 1A, Effective Range 0~1.5A.	Dielectric Strength	: 2.0KV 50/60HZ AC / Min Between Input / Power / Case.
Input Burden	: Voltage0.25VA ; Current0.2VA@50/60Hz	Power Supply	: AC 85~265V 50 / 60Hz DC 100~300V
Input Frequency	: 45~70HZ	Dimension	: 96 W X 48 H X 100 D mm.
Input Over	: Normal AC 5A, Current Over 15A Continuous Normal AC 440V, Voltage Over 600V Continuous	Cut-out	: 92W x 44H < mm >
Digital Output Load	: RS-485 MODBUS RTU	Mounting	: Panel Flush Mounting
Baudrate	: 2400.4800.9600.19200.38400.57600	Housing Material	: ABS Plastic, Self-Extinguishing
Address	: 1~255	Operating Condition	: $-10^{\circ}C \sim 55^{\circ}C$ 20 ~ 95% RH Non-Condensed.
		Storage Condition	: $-40^{\circ}C \sim 75^{\circ}C$ 20 ~ 95% RH Non-Condense

SIZE (mm)

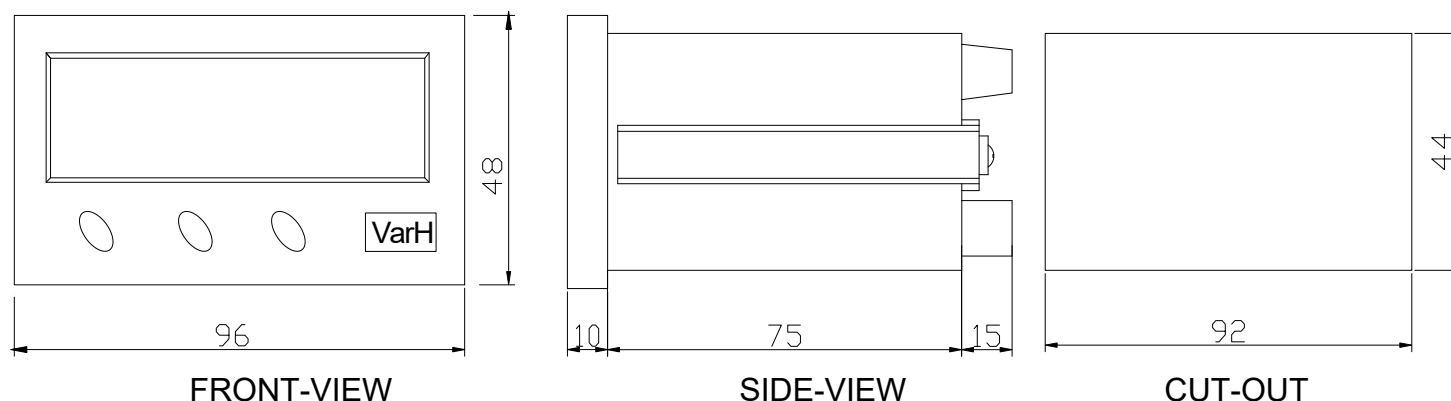

TERMINALS

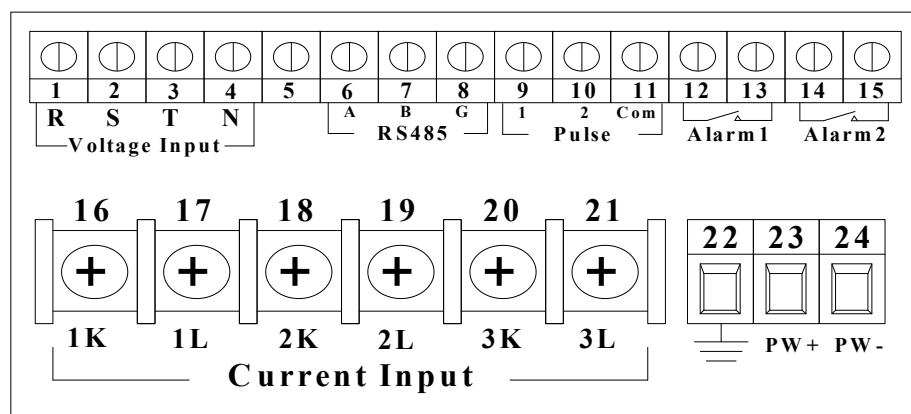

CONNECTION DIAGRAM

電壓及電流輸入 INPUT Voltage and Current

