

AC&M Power Factor Transducer

Features:

- Dual Aux. Power 110/220V AC
- High Accuracy
0.2% RO at 23°C±5°C
- High Dielectric Strength
2.6KV AC / Min, Between Input / Output / Power Case
- ABS Plastic Case, DIN Rail or Wall Mounting




TDPF											
Circuit		Input Voltage		Input Current		Frequency		Output Signal		Aux. Power	
A	1 ϕ 2W	A	110V (50~150V)	A	1A	A	50Hz	A	DC 0~10mA	A	AC 110/220V
B	3 ϕ 3W	B	220V(150~300V)	B	5A	B	60Hz	B	DC 0~20mA	B	AC 220V
C	3 ϕ 4W							C	DC 4~20mA	C	DC 22~72V
								D	DC 0~5V	F	AC/DC 85~265V
								E	DC 1~5V	N	Self-Power Mode
								F	DC 0~10V	Y	Other
Y	Other	Y	Other	Y	Other			Y	Other		

SPECIFICATIONS

Accuracy	: 0.2%RO at 23°C±5°C (Self-Power Mode 0.25%RO at 23°C±5°C).
Input Range	: Normal Voltage 110V, Effective Range 85~150V. Normal Voltage 220v, Effective Range 160~300V. Normal Current 5A, Effective Range 0~7.5A. Normal Current 1A, Effective Range 0~1.5A.
Input Burden	: 0.1VA / 60Hz at 150V AC ; Self-Power Mode 2VA at 150V AC.
Frequency	: 45 ~ 70Hz.
Input Over	: Normal AC 110V, Voltage Over 500V Continuous. Self-Power Mode 150V AC Maximum. Normal AC 5A, Current Over 15A Continuous; 50A 10 Sec / Hour ; 400A 0.5 Sec / Hour.
Output Load	: DC Current Mode : 10V DC Maximum, DC Voltage Mode : 10mA Maximum.
Output Protection	: Without Damage for Output Open or Short Circuit.
Dielectric Strength	: 2.6KV AC / 1 Min, between Input / Power / Case.
Impulse	: 5KV 1.2X50 uS, ANSI C37.90a/1983.DIN, IEC 255 - 4,IEC 688-1992. 2.5KV - 0.25mS/1MHz IEC 801-3(Ring WAVE).
Common MOde Rejection	: >120db, 50 / 60Hz.
Stability	: <0.2%/Year.
Calibration	: SPAN and ZERO $\pm$ 10%.
Response Time & Ripple(p-p)	: $\leq$ 400mS. 0 ~ 99%; 0.5% P-P(STD) or Option.
Magnetic Effect	: DIN - IEE688 $\leq$ 0.005% Change 10" Center 100A-Turn.
Temperature Coefficient	: $\leq$ 100ppm / °C From 0~60°C; $\leq$ 50ppm/23°C±3°C.
Operating Condition	: -10°C ~ +65°C 20 ~ 95% RH Non-Condensed.
Storage Condition	: -40°C ~ +75°C 20 ~ 95% RH Non-Condensed.
Power Supply	: AC or DC $\pm$ 20%, 50 / 60Hz $\leq$ 3VA/AC.
Aux. Power Effect	: <0.01% / V.
Housing Material	: ABS Plastic, Self-Extinguishing to UL Subject 94 Class V-O. Case IP 50 Snap Mounting On DIN EN 50022-35 Or Surface Mounting. Compliance With IEC 529, BS 5490, DIN 40054. Protection Touch-Proof Terminals And Enclosure Meeting Requirements Of VBG 4 & VDE 0106 oart 100(Germany).
Mounting	: DIN Rail or Wall Mounting.
Size	: 120 ^W X 115 ^H X 73.4 ^L mm
* Bi-Direction for Power Factor. Example : O/P 4~20mA VS -0.5(C)~1~+0.5(L).	
* Self-Power Mode : Effective Range 85~150V AC, Power Source from V1 Voltage.	

Dimension (mm)

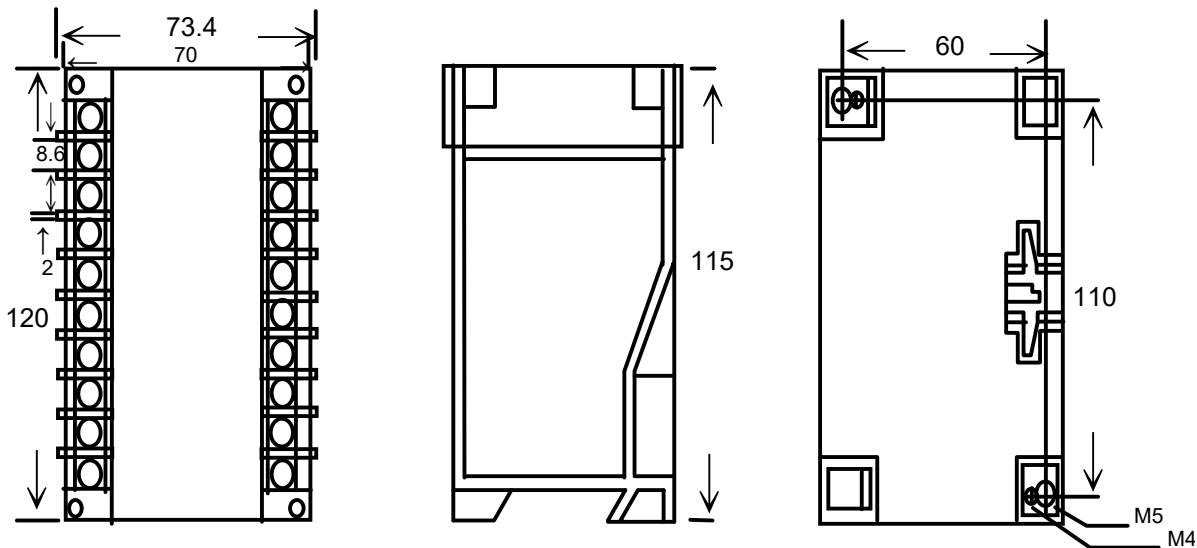

Connection Diagram Model :TDPF

